


TO (24) 2 WIRE LOAD CIRCUITS

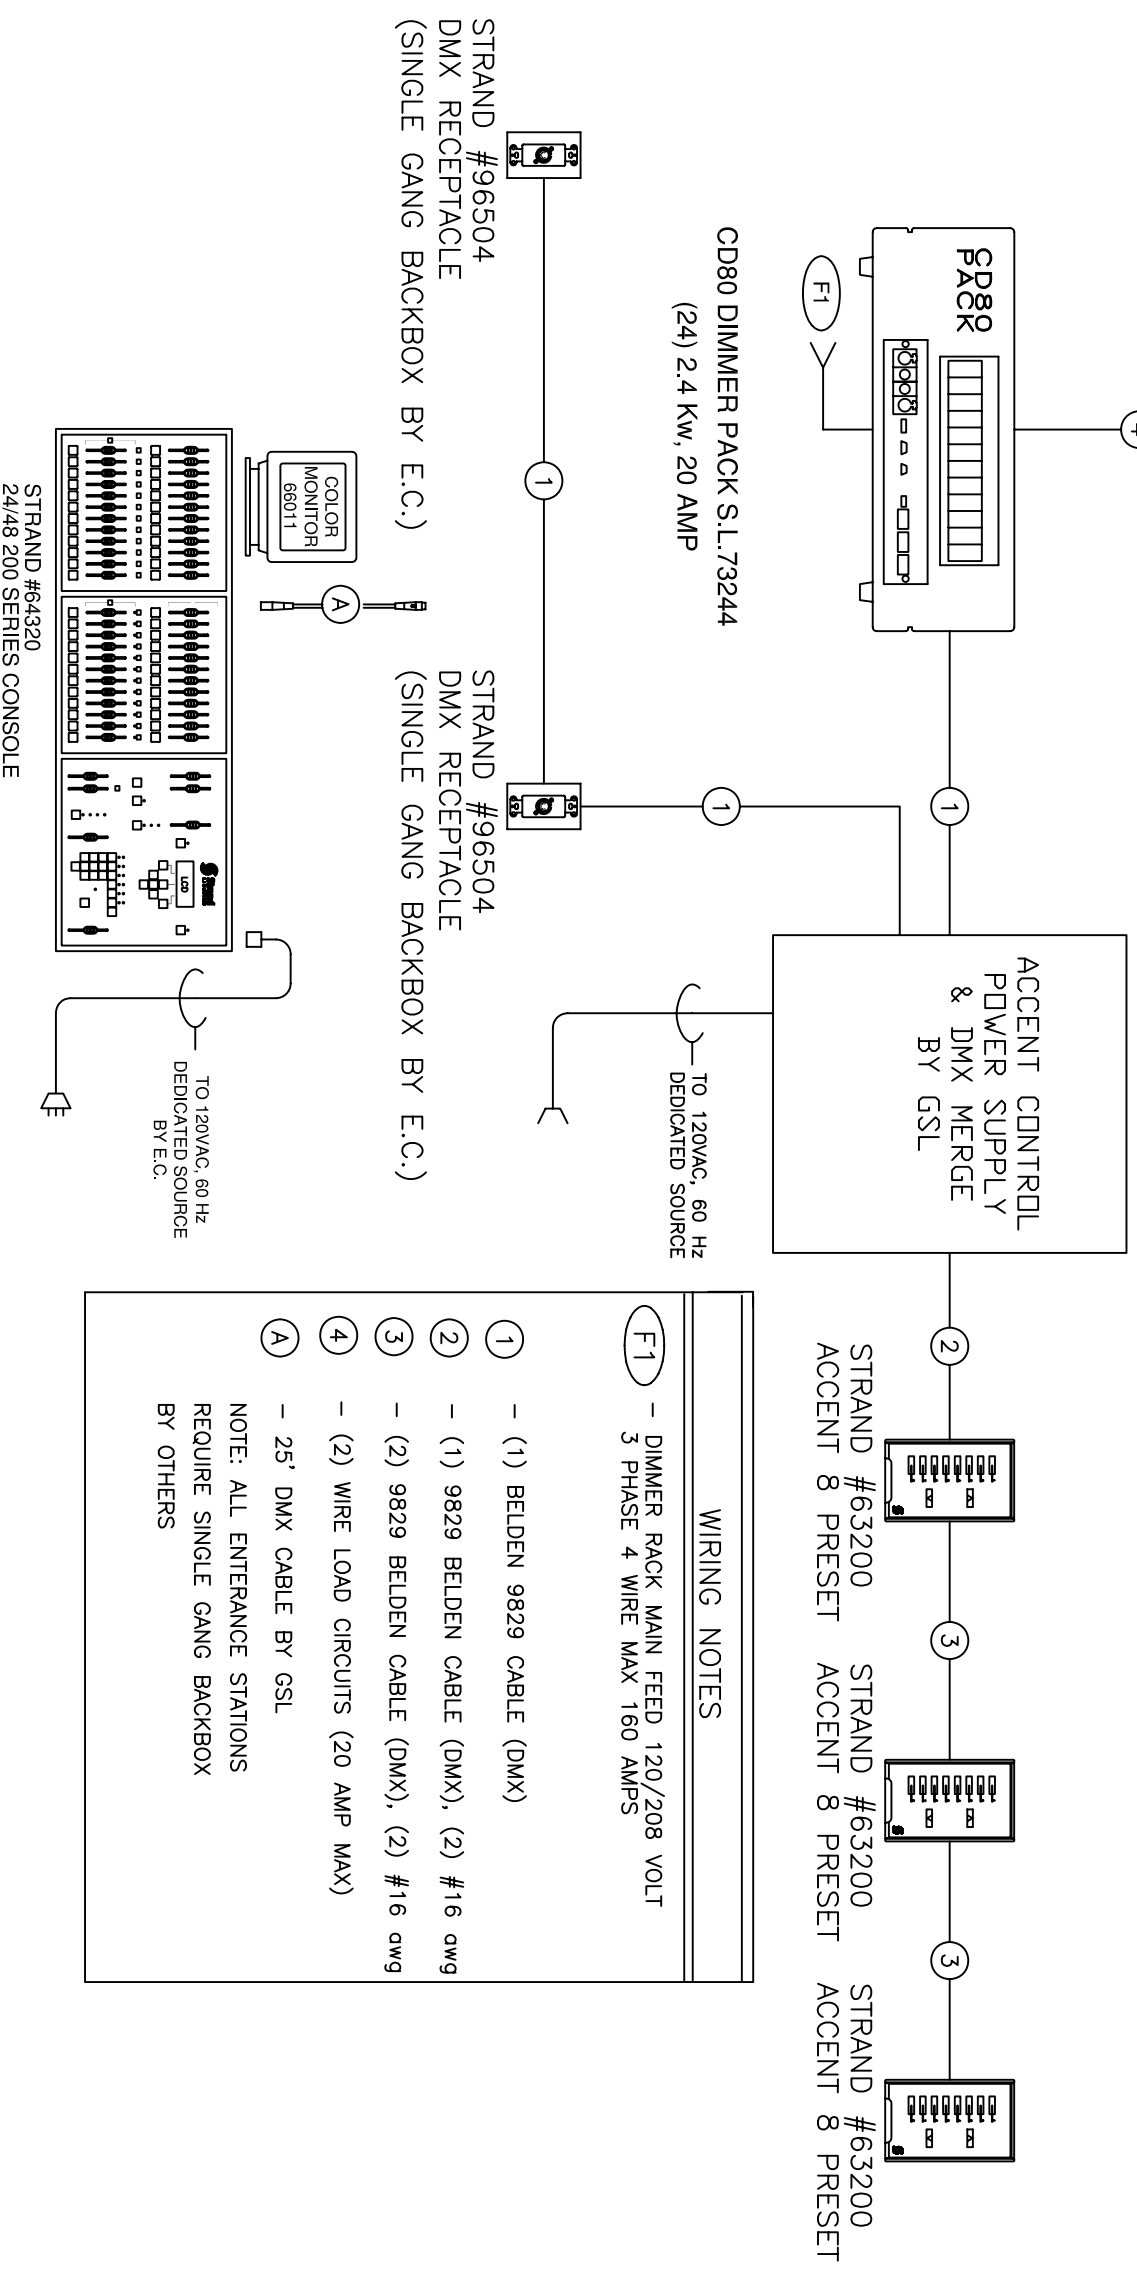


WIRING NOTES

- (F1) - DIMMER RACK MAIN FEED 120/208 VOLT
3 PHASE 4 WIRE MAX 160 AMPS
- (1) - (1) BELDEN 9829 CABLE (DMX)
- (2) - (1) 9829 BELDEN CABLE (DMX), (2) #16 awg
- (3) - (2) 9829 BELDEN CABLE (DMX), (2) #16 awg
- (4) - (2) WIRE LOAD CIRCUITS (20 AMP MAX)
- (A) - 25' DMX CABLE BY GSL

NOTE: ALL ENTERANCE STATIONS
REQUIRE SINGLE GANG BACKBOX
BY OTHERS

ALL DESIGNS, CONSTRUCTION AND OTHER DISCLOSURES SET FORTH HEREIN ARE THE PROPERTY OF GRAND STAGE AND SUCH INFORMATION IS IMPARTED TO YOU IN CONFIDENCE. IN ACCEPTING THIS INFORMATION YOU AGREE NOT TO REPRODUCE IT, TO MANUFACTURE IT, DISCLOSE IT, OR HAVE IT MANUFACTURED IN WHOLE OR IN PART WITHOUT THE WRITTEN PERMISSION OF GRAND STAGE COMPANY.



Signatures:	Date:	Title:	
Drawn: GB		TYPICAL SIMPLE RISER	
Checked: MH		SAMPLE HIGH SCHOOL	
Issued:		SOME WHERE, USA	
Drawn By:		Size: 11 X 17	Job No.
simple_riser.dwg		Scale:	