

eNODE 4™



The **eNode4™** is 4-universe Ethernet-DMX node which supports Art-Net, sACN, and RDM compatible DMX control systems utilizing 2 RJ45 etherCON auto-switching 10/100Mbps inputs and 4 5pin DMX ports which can be configured as inputs or outputs. Features include DMX bilateral conversion support, sACN auto-detection, variable MAC address assignable, auto MDI/MDIX, DMX splitter function (1 input / 3 outputs), broadcast and backup modes, built-in Ethernet repeater switch, an LCD control menu display and LED indicators, push button configuration encoder wheel, a lightweight die-cast aluminum housing, and includes a mini omega bracket for clamp mounting. (clamp not included)



FEATURES

4-Universal Ethernet-DMX Node

Art-Net, sACN, and RDM Compatible DMX Control Systems

Support

DMX Bilateral Conversion Support Compact

sACN Auto-Detection

Variable MAC Address Assignable

Auto MDI/MDIX

DMX Splitter Function (1 Input / 3 Outputs)

Broadcast Mode (One Device Transmits Same Signal to Other Connected Devices)

Backup Mode

Omega Bracket Included for Clamp Mounting



Specifications are subject to change without notice ©Elation Professional 07/16/18

Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, Netherlands
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu

PRODUCT SPECIFICATIONS

CONTROL / CONNECTIONS

4-Universes
 DMX, RDM, Art-Net, and sACN Protocol Support
 DMX Bilateral Conversion
 sACN Auto-Detection
 Auto MDI/MDIX
 DMX Splitter Function (1 Input / 3 Outputs)
 Broadcast Mode (One Device Transmits Same Signal to Other Connected Devices)
 Backup Mode
 Push Button Configuration Encoder Wheel
 LCD Control Menu Display & LED Indicators
 (2) RJ45 etherCON TCP/IP 10/100M Inputs
 (4) Universal 5pin DMX Ports (Input or Output)
 powerCON Power In

SIZE / WEIGHT

Length: 10.0" (255mm)
 Width: 6.8" (173mm)
 Vertical Height: 1.7" (43mm)
 Weight: 3.5 lbs. (1.6kg)


ELECTRICAL / THERMAL

AC 100-240V - 50/60Hz
 5W Max Power Consumption
 35.6°F (2°C) to 113°F (45°C)

APPROVALS



DIMENSIONAL DRAWING

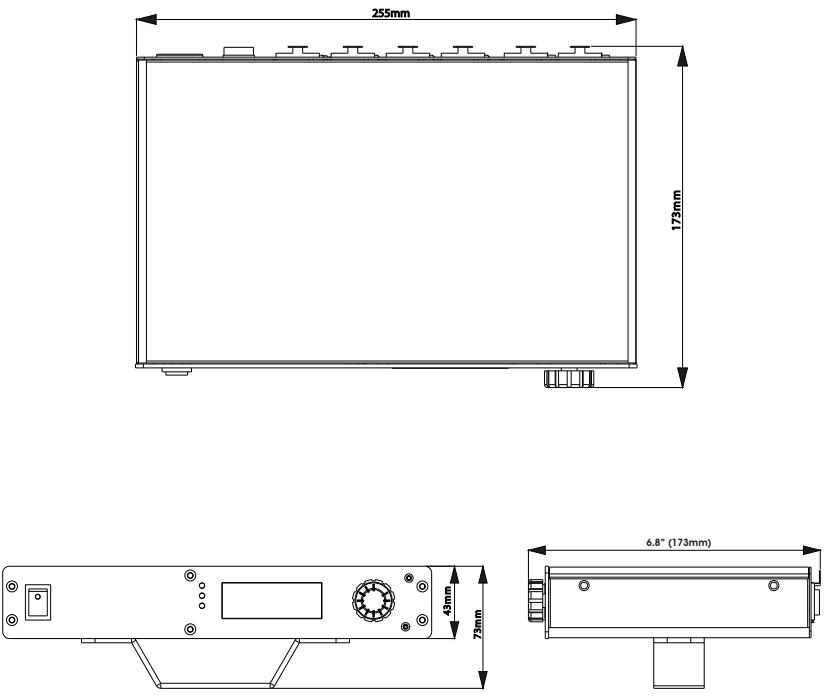

ORDERING INFORMATION

ENO406	eNODE 4™
QUICK RIG CLAMP	Low Profile Quick Release Clamp
AC5PDMX5PRO	5 ft. (1.5m) 5pin PRO DMX Cable
CAT6PRO5	5 ft. (1.5m) CAT6 PRO EtherCON Cable
	Additional cable lengths available

